


38 SPECIAL NONTOX

TFMJ 158 GRS SB38NT



After firing the cartridge is free from toxic exposure to barium, lead, mercury, antimony. It does not pollute the environment, does not endanger the shooter's health with combustion products, and does not leave harmful residue in the gun. It ensures safe shooting in closed premises and on target ranges. Unique patented primer design.

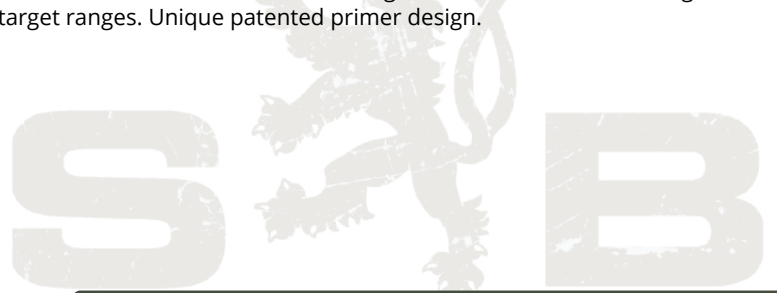

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|---|
| BULLET | TYPE | | TFMJ |
| | WEIGHT | grs | 158 |
| | DIAMETER | in | 0.357 |
| | SECTIONAL DENSITY | lb/in ² | 0.177 |
| | MATERIAL OF JACKET | | CuZn 30 |
| BALLISTIC COEFFICIENT | | G1 | 0.184 |
| PRIMER | TYPE | | Boxer |
| | STYLE | | Small Pistol Primer |
| CARTRIDGE | LENGTH | in | 1.520 |
| CASINGS | | | Factory Brass |
| POWER FACTOR ESTIMATED | kgr-fps | | 137.9 |
| +P AMMUNITION | | | No |
| TEST BARREL LENGTH | in | | 7½ |
| SUGGESTED USE | | | Range, Match/Competition |
| FEATURES | | | Fully Encapsulated Bullet, Reliable Functioning, Non-expanding, No Barrel Leading |

PACKAGING

| | |
|-----------------|-------|
| BOXES PER CASE | 20 |
| WEIGHT PER CASE | lb 36 |

BALLISTICS

| | | | | | |
|------------------|-------|--------|-----|------|-------|
| DISTANCE | y | MUZZLE | 25 | 50 | 100 |
| VELOCITY | fps | 873 | 855 | 838 | 806 |
| ENERGY | ft-lb | 267 | 256 | 246 | 228 |
| DISTANCE | y | 12.5 | 25 | 50 | 100 |
| POINTS OF IMPACT | in | 0.1 | 0.1 | -2.4 | -18.9 |

