


30-06 SPRING. TXRG 180 GRS SB3006XB



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

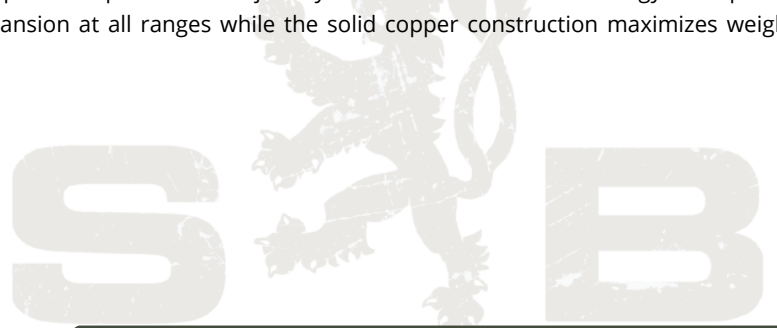

PROPERTIES

| | | | |
|-------------------------------|--------------------|--------------------|-------|
| BULLET | TYPE | | TXRG |
| | WEIGHT | grs | 180 |
| | DIAMETER | in | 0.308 |
| | SECTIONAL DENSITY | lb/in ² | 0.271 |
| | MATERIAL OF JACKET | | - |
| BALLISTIC COEFFICIENT | | G1 | 0.442 |
| | | G7 | 0.222 |
| CARTRIDGE | LENGTH | in | 3.339 |
| POWER FACTOR ESTIMATED | | kgr-fps | 501.3 |
| TEST BARREL LENGTH | | in | 23½ |
| SUGGESTED USE | | | N/A |
| FEATURES | | | N/A |

PACKAGING

| | | | |
|------------------------|--|----|------|
| BOXES PER CASE | | | 12 |
| WEIGHT PER CASE | | lb | 19.2 |

BALLISTICS

| | | | | | | |
|-------------------------|-------|--------|-------|-------|-------|-------|
| DISTANCE | y | MUZZLE | 100 | 200 | 300 | 400 |
| VELOCITY | fps | 2,654 | 2,452 | 2,258 | 2,074 | 1,899 |
| ENERGY | ft-lb | 2,815 | 2,402 | 2,038 | 1,719 | 1,440 |
| DISTANCE | y | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | in | -0.3 | 0.0 | -3.8 | -14.4 | -33.2 |

