


300 AAC BLACKOUT TXRG 110 GRS SB300BLKXA



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

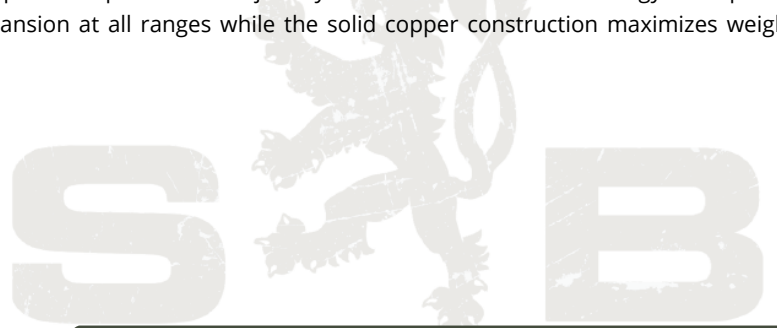

BALLISTICS

DISTANCE	y	MUZZLE	100	200	300	400
VELOCITY	fps	2,215	1,939	1,682	1,441	1,218
ENERGY	ft-lb	1,198	918	691	507	362
DISTANCE	y	50	100	200	300	400
POINTS OF IMPACT	in	0.0	0.0	-7.3	-27.0	-63.7

PROPERTIES

BULLET	TYPE		TXRG
	WEIGHT	grs	110
	DIAMETER	in	0.308
	SECTIONAL DENSITY	lb/in ²	0.166
	MATERIAL OF JACKET		-
BALLISTIC COEFFICIENT		G1	0.288
		G7	0.145
CARTRIDGE	LENGTH	in	2.224
POWER FACTOR ESTIMATED		kgr-fps	243.7
TEST BARREL LENGTH		in	16¼
SUGGESTED USE			N/A
FEATURES			N/A

PACKAGING

BOXES PER CASE			50
WEIGHT PER CASE	lb		34.2

