


40 S&W

JHP ^{180 GRS} SB40C

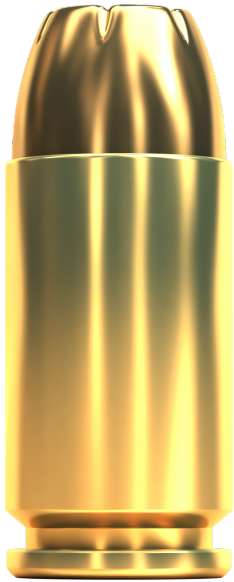

Jacketed Hollow Point bullet. Standard 2 piece bullet construction designed for reliable feeding and function in a wide variety of firearms. An excellent defensive projectile.

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|---------|
| BULLET | TYPE | | JHP |
| | WEIGHT | grs | 180 |
| | DIAMETER | in | 0.400 |
| | SECTIONAL DENSITY | lb/in ² | 0.161 |
| | MATERIAL OF JACKET | | CuZn 10 |
| BALLISTIC COEFFICIENT | | G1 | 0.246 |
| PRIMER | TYPE | | N/A |
| | STYLE | | N/A |
| CARTRIDGE | LENGTH | in | 1.122 |
| CASINGS | | | N/A |
| POWER FACTOR ESTIMATED | | kg-fps | 175.3 |
| +P AMMUNITION | | | No |
| TEST BARREL LENGTH | | in | 4 |
| SUGGESTED USE | | | N/A |
| FEATURES | | | N/A |

PACKAGING

| | |
|-----------------|-------|
| BOXES PER CASE | 20 |
| WEIGHT PER CASE | lb 40 |

BALLISTICS

| | | | | | |
|------------------|-------|--------|-----|------|-------|
| DISTANCE | y | MUZZLE | 25 | 50 | 100 |
| VELOCITY | fps | 974 | 956 | 938 | 907 |
| ENERGY | ft-lb | 379 | 365 | 352 | 328 |
| DISTANCE | y | 12.5 | 25 | 50 | 100 |
| POINTS OF IMPACT | in | 0.0 | 0.1 | -1.7 | -13.0 |

